


emcosafe

785201

NM3 Downlight

Supplied with White and Black Facias
Manual or Auto-test Selectable

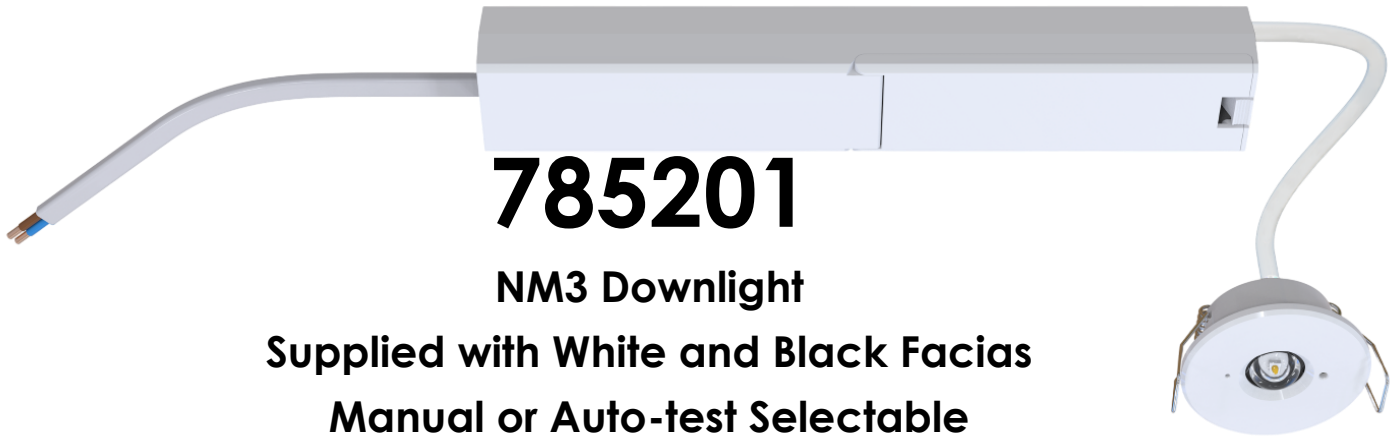

Specification:

Construction:	IP20 with polycarbonate gear case. White and black facias supplied.
Optics:	Supplied with interchangeable open area and corridor lenses
Head Dimensions:	50mmØ diameter, 37mmØ cut-out, 21mm depth
Gear Dimensions:	Length: 185mm, Width: 29mm, Height: 24mm
Emergency Power:	1W
Colour Temperature:	4000K
Maintained Mode:	Not applicable
Emergency Mode:	150 Lumens
Emergency Duration:	3 Hours
Battery:	LiFePO4 3.2V 1800mAH



Illustrated with Black Facia

Test Modes:	Manual test mode or Automatic Self-Testing conforming with IEC 62034 Selectable via switch on case side.	
Automatic Test Regime:	Functional (120 second) test at monthly intervals Full duration test (3 hours) annually	
Bi-Colour LED Status:	Green On	Normal healthy status
	Green Fast Flash	Battery charging
	Green Slow Flash	Duration or annual test underway
	Red On	Lightsource failure
	Red Fast Flash	Duration failure—insufficient battery capacity
	Red Slow Flash	Battery out of temperature range