



LED Emergency Exit Blade 30m Viewing LiFePO4 Polycarbonate

Caution:

- Ensure that the mains supply is disconnected before installing, maintaining or servicing the emergency luminaire.
- Luminaires should only be installed by a qualified electrician or competent person. The installation must comply with current building and IEE wiring regulations.
- We accept no responsibility for injury, damage or loss, which may arise as a result of incorrect installation, operation or maintenance.
- This product is guaranteed for a period of 5 years from the date of purchase. The warranty covers for both luminaire and battery.







Specification

Rated Input	220-240Vac, 50/60Hz
Rated LED Wattage	1W
LiFePO4 Battery	3.2V 1.8Ah
Viewing Distance	30m
Rated Ambient Temp.	0-45 °C

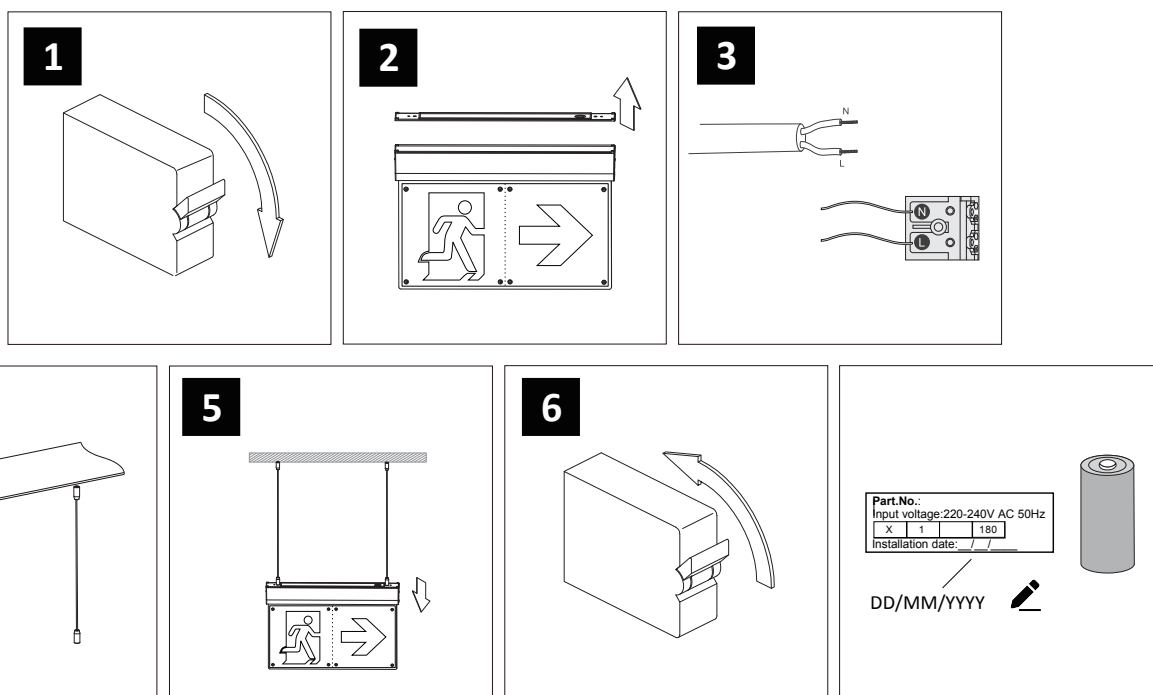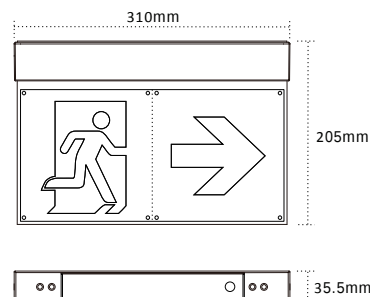

LED indicator status		
Indicator	Status	LED indicator flash code
Green	No Faults	On
	Battery under charging	Flashing once every second
	Autotest underway	Breathe flashing
Red	Open circuit/LED Failure	Flashing twice every second
	Duration test failure/battery dis-connected	Flashing once every second
	Temp. out of battery working range	Flashing once every 2s
Green & Red	Emergency mode/Mains failure	Off

LED Emergency Exit Blade 30m Viewing LiFePO4 Polycarbonate

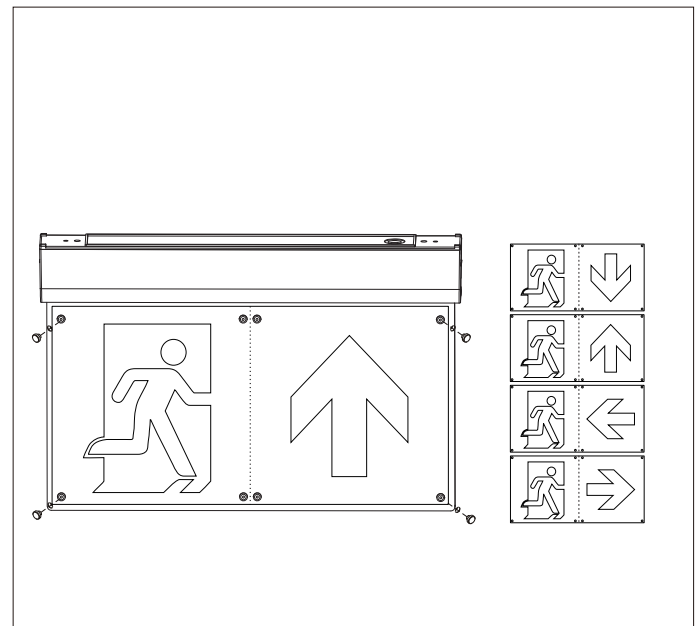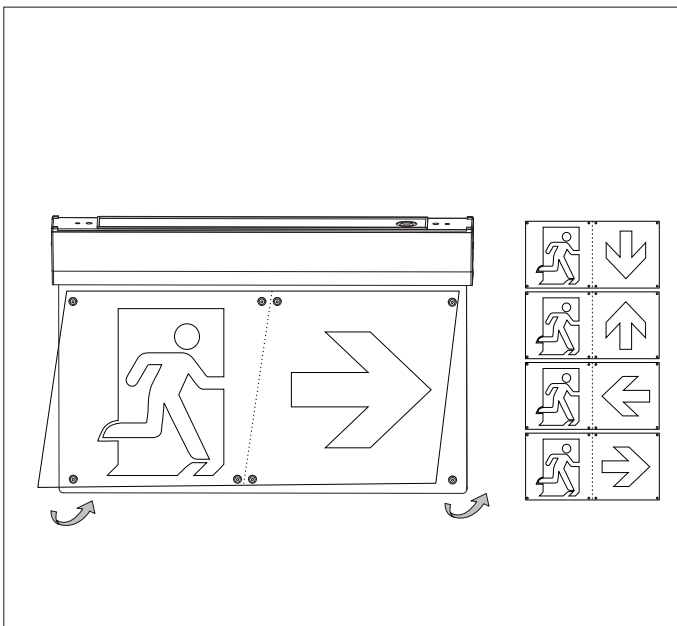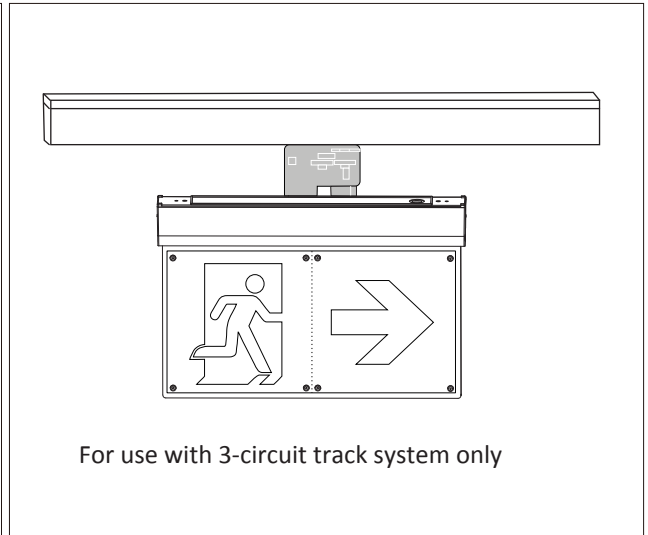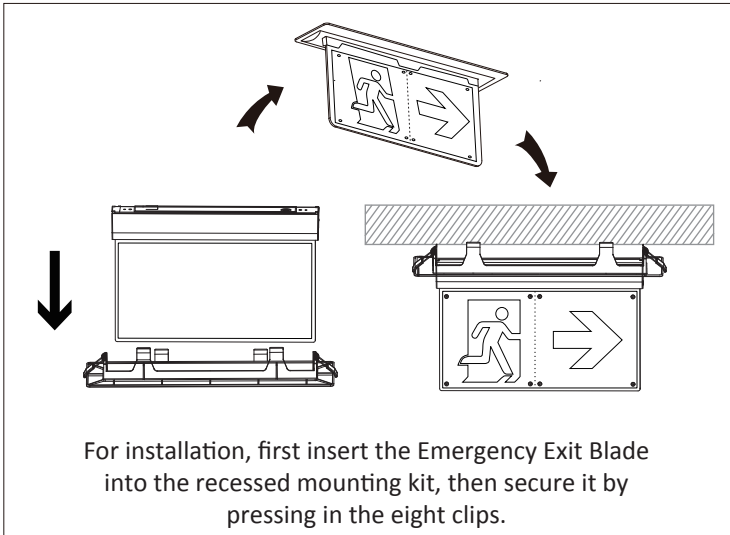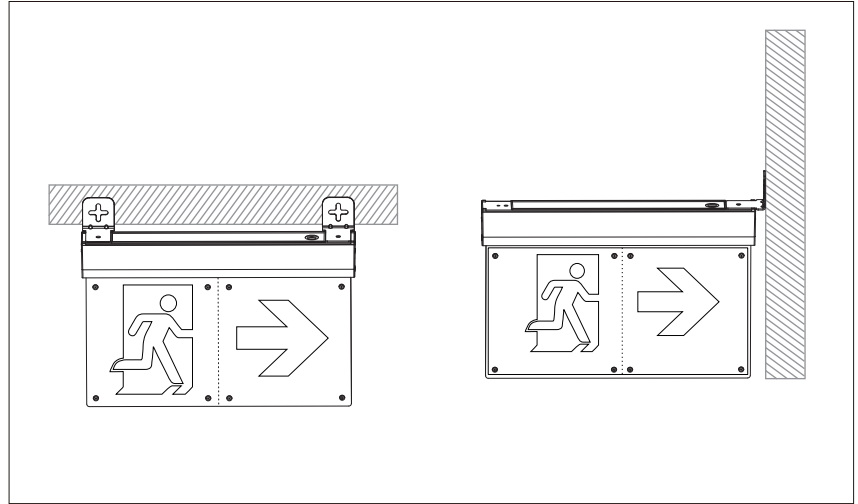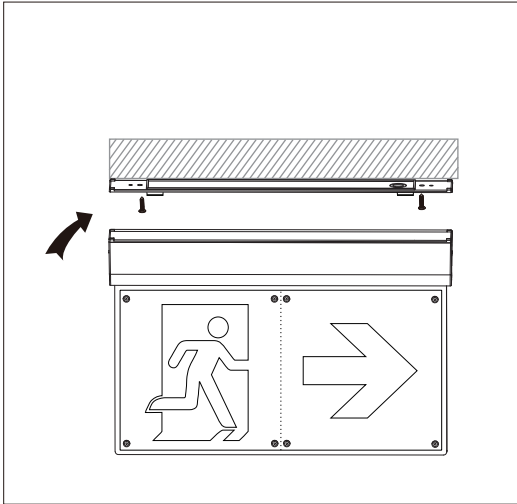

LED Emergency Exit Blade 30m Viewing LiFePO4 Polycarbonate

Caution:

Please keep this test record in a safe place.
It is the responsibility of the installer/user to ensure that this product is suitable for its intended application and it has been installed and maintained in full compliance to the details and guidelines set out in the product installation instruction manual

Routine inspection and Testing

All Emergency luminaires should be routinely inspected and tested in accordance with local standards.
All tests procedures should be undertaken at times of least risk and in accordance with local standards

Daily Check

Visual inspection of the LED battery charge indicator to ensure that it is illuminated.

Monthly Functional Test / Yearly Duration Test

The auto-test version devices run monthly function test and yearly duration test automatically. isualinspection ofthelED battery chare indicator to ensure that the grenar red LED is iluminated permanently without any red colour flashin (fast or slow flashing.Ffor devices without auto-test function, simulate a main suply fauire for aperiod of time monthly for function check, and also for 3 hours full duration check yearly.

Test Record

Record all test results and any comments in the table below.

Product Code:

Product Location:

Batch Number:

Installation Date:

Installation By:

Contact Details:

Initial Commissioning

3-Hour Test

Test Date:

Test Duration:

Tested By:

Signed:

Month	Test	1st Year		2nd Year		3rd Year		4th Year		5th Year	
		Sign	Date			Sign	Date	Sign	Date	Sign	Date
01	Functional										
02	Functional										
03	Functional										
04	Functional										
05	Functional										
06	Functional										
07	Functional										
08	Functional										
09	Functional										
10	Functional										
11	Functional										
12	3 Hour Discharge										

(A completed copy of the Emergency test record sheet must accompany any product retured to the manufacturer for any reason.)