


emcosafe

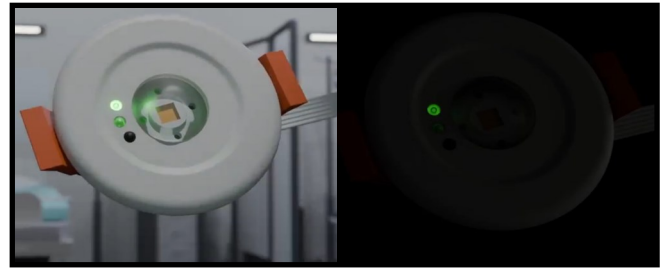

LowGlow

Downlight with dimming indicator


LowGlow Specification:

Dimensions:	Head: 60mm diameter x 30mm Gear Kit: 230mm x 82mm x 40mm angled can. See drawing below
Cutout:	50mm. Minimum ceiling void height to insert gear kit: 110mm
Optional Bezel:	120mm diameter bezel for existing oversized cutouts. See images below.
Protection:	IP54 to front face / IK06
Indicator Dimming:	By integral photocell
Test Mode:	Manual
Input Power:	5W Max @ 220/240V Charging. Standby Power <0.5W
Emergency Power:	3W
Emergency Mode:	330 Lumens. 4000K. Open area lens 47°
Emergency Duration:	3 Hours
Recharge Time:	8 hours (16 hours for initial charge)
Battery:	2 x Li-ion 3.6V 5.0Ah

PRODUCT CODES

White Downlight:	LowGlowNM3WH
Black Downlight:	LowGlowNM3BL
White Bezel:	LowGlowBEZWH
Black Bezel:	LowGlowBEZBL

DIMENSIONS

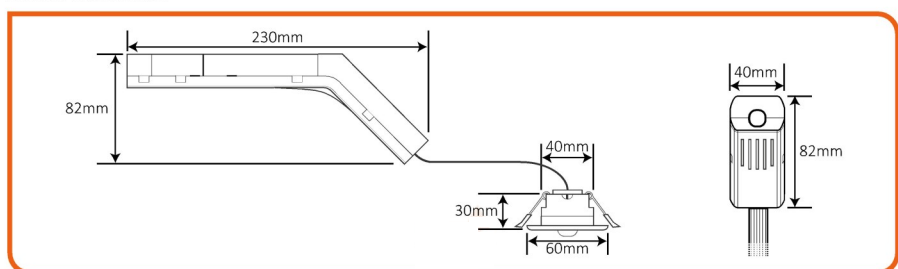

T: 01992 582033

E: sales@emcogroup.co.uk